

### MOUNTING LOCATION:

Right side of radio

### CELL PHONE & MEDIA MOUNT

### INSTALLATION INSTRUCTIONS

### TOOLS REQUIRED:

Hook tool, Phillips screwdriver

PART#: **75117-800**

MFG: **HONDA**

### HARDWARE INCLUDED:

None

MODELS & YEARS:

**S2000 2000-2009**

### \*\* ADVISEMENT \*\*


Read instructions completely prior to starting installation. All InDash Mounts are designed so that after installation, phone is facing normal driver position for left-hand drive vehicles. This mount is not designed to be used in foreign countries with right-hand drive vehicles. Use extreme care when working around the plastic components on the dash. Excess force, can cause breakage of the plastic components.

**STEP #1: 04-05 Only, 2000-2003 skip to STEP #2.** With your hands and/or hook tool remove the console top bezel by lifting up on the front of the bezel around the shifter to release a total of (8) clips. (4) clips around the center of the shifter and (4) clips by the arm rest. Lift up and back on the bezel that includes the cubby switches and arm rest.

**STEP #2:** Open radio cover door. Insert hook tool into lower right side of strip below radio cover door and release snap. Repeat on the left side. Slightly pull out bottom portion of bezel that included radio door and vents above radio. With hook tool insert it on the right side of bezel between bezel and dash, pull to unsnap. Pull out the top of the vents with your hands to release tension on clips. Insert hook tool on the left side and release those clips also.

**STEP #3:** With your hands wiggle the whole bezel out, put stick shift into a gear farthest away from radio, 2, 4, or 6. Remove bezel and set aside. Remove the (2) lower screws that hold the right side of the radio. Place the InDash Mount over the lower (2) holes and reinstall the screws. Make sure the mount is flush up against the soft side of the dash. (It may be necessary to remove some excess dash burr to get mount to fit flush.)

**STEP #4:** Replace bezel by pushing straight in, top first, then sides, then bottom, and check for smooth door operation.

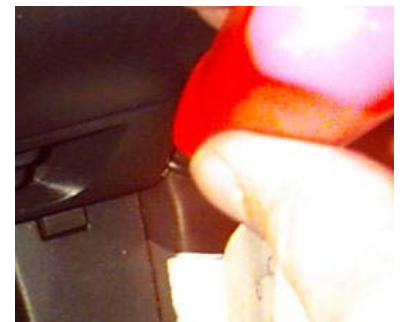

Hook tool insert location



Bezel View

INSTALLATION IS COMPLETE

ENJOY YOUR NEW INDASH by PANAVISE MOUNT



InDash with door closed



Mounting location



12-16-08